


TEMPORARY PAVEMENT REPAIR DETAIL


NOTES:

1. TWELVE (12") OF COMPACTED PROCESSED STONE MAY BE PLACED UNDER THE TEMPORARY PAVEMENT AND LEFT IN PLACE FOR THE PERMANENT REPAIR.
2. PERMANENT TRENCH REPAIRS FOR STREETS WITH CONCRETE PAVEMENT OR CONCRETE BASE MAY CONSIST OF 2" BIT. CLASS 1, 6" BIT. CLASS 4, AND 10" GRAVEL SUBBASE AT THE DISCRETION OF THE TOWN ENGINEER.
3. AT THE REQUEST OF THE TOWN ENGINEER THE CONTRACTOR SHALL VERIFY AND SUBMIT PROPER TESTING RESULTS THAT COMPACTION MEETS WITH TOWN'S STANDARDS FOR A 95% COMPACTED DENSITY.

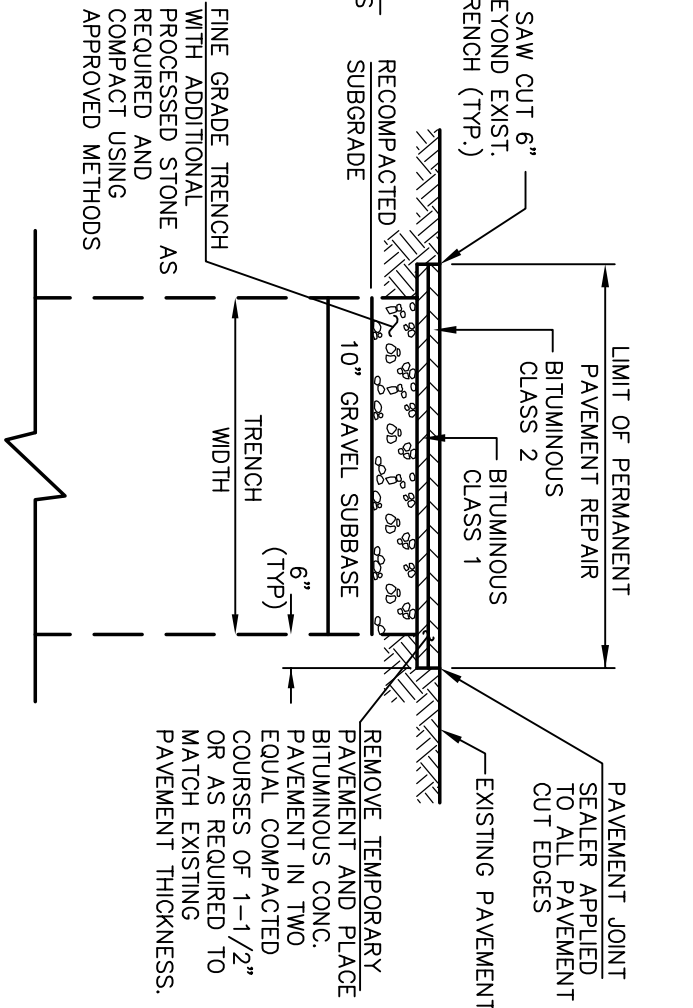

PERMANENT PAVEMENT REPAIR DETAIL

SCALE : NONE
 DRAWN BY: SR
 CHECKED BY: SMB
 APPROVED BY: DAP
 LAST REVISED:
 4/29/2008



TOWN OF GLASTONBURY
 DEPARTMENT OF PHYSICAL SERVICES
 ENGINEERING DIVISION
 TEMPORARY AND
 PERMANENT PAVEMENT
 REPAIRS